

KB 160124

How do I disable the DIGIPASS Server-Side PIN in IDENTIKEY Authentication Server?

Creation date: 23/06/2017

Last Review: 23/06/2017

Revision number: 2

Document type: How To

Security status: EXTERNAL

Summary

If you have imported a dpx file that enables DIGIPASS PIN support but you no longer wish to use PIN because you are leveraging a back-end password in place of the PIN you can disable the DIGIPASS PIN with the following instructions.

Details

Change PIN with IAS with an ODBC data store

1. Log into the IAS Webadmin by navigating your browser to <https://ip-address:8443>
2. Locate the user by typing the userid in the Find field and select search.
3. Click on the Serial Number for the DIGIPASS you wish to manage



The screenshot shows the IAS Webadmin interface. At the top, there is a navigation menu with tabs: HOME, USERS, DIGIPASS, POLICIES, CLIENTS, BACK-END, ORGANIZATION, REPORTS, SERVERS, SYSTEM. Below the menu is a search bar with 'user2' entered. The search results show one user: 'user2' from the 'vasco.local' domain. The 'Assigned DIGIPASS' column for this user shows the serial number '1804090020', which is highlighted with a red box. Below the table, there are buttons for 'ASSIGN DIGIPASS', 'MOVE', 'UNASSIGN DIGIPASS', and 'DISABLE', along with an 'Other Actions...' dropdown menu.


Applies to: IAS (IDENTIKEY Authentication Server)

KB 160124- 23/06/2017

© 2017 VASCO Data Security. All rights reserved.

Page 1 of 4


- Select the Application tab of the DIGIPASS. In this example, the name on the application tab is GO6DEFAULT. Notice that PIN Supported is enabled.

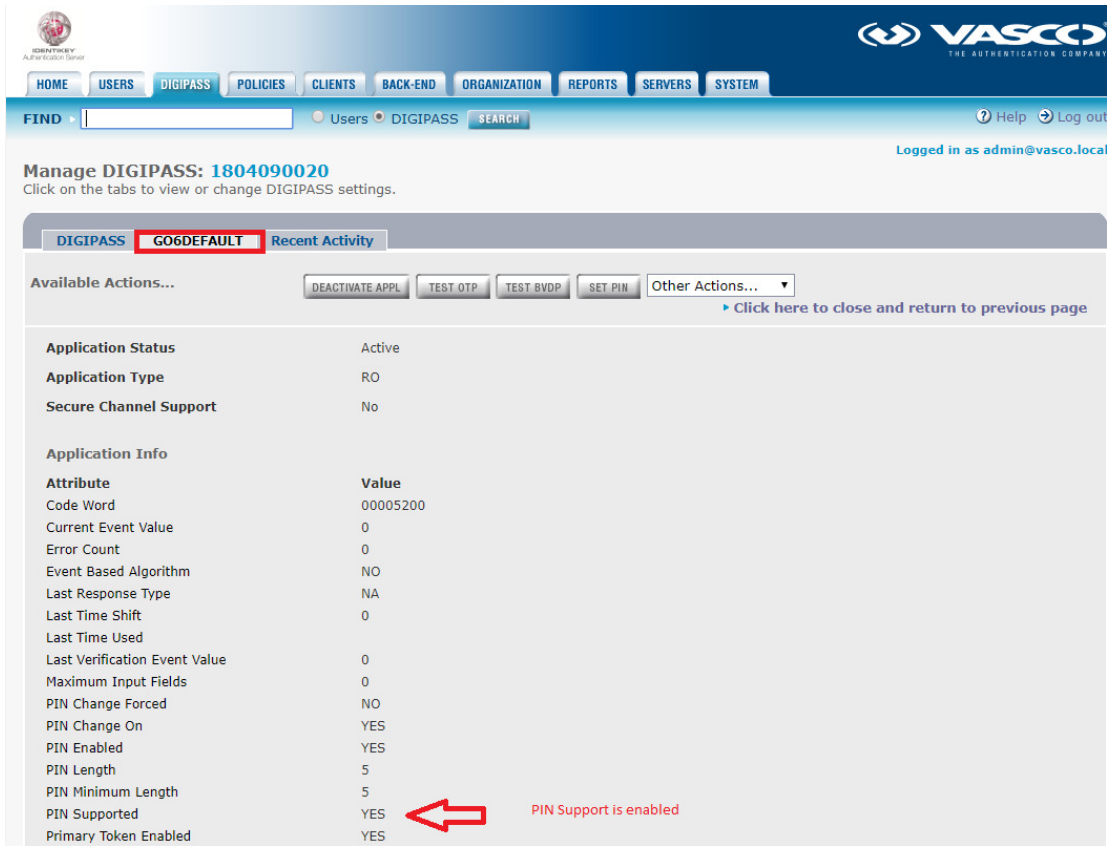

Manage DIGIPASS: 1804090020
Click on the tabs to view or change DIGIPASS settings.

DIGIPASS **GO6DEFAULT** Recent Activity

Available Actions... Other Actions... [Click here to close and return to previous page](#)

Application Status	Active
Application Type	RO
Secure Channel Support	No
Application Info	
Attribute	Value
Code Word	00005200
Current Event Value	0
Error Count	0
Event Based Algorithm	NO
Last Response Type	NA
Last Time Shift	0
Last Time Used	
Last Verification Event Value	0
Maximum Input Fields	0
PIN Change Forced	NO
PIN Change On	YES
PIN Enabled	YES
PIN Length	5
PIN Minimum Length	5
PIN Supported	YES  PIN Support is enabled
Primary Token Enabled	YES

- Select Disable PIN from the Other Actions drop down list.



Manage DIGIPASS: 1804090020
Click on the tabs to view or change DIGIPASS settings.

DIGIPASS **GO6DEFAULT** Recent Activity


Available Actions... Other Actions... [Click here to close and return to previous page](#)

Application Status	Active
Application Type	RO
Secure Channel Support	No


- Other Actions...
- Reset PIN
- Force PIN Change
- Reset Application
- Delete Application
- Disable PIN**

Disable PIN on IAS with an Active Directory data store


1. Open the VASCO Active Directory Users and Computers mmc

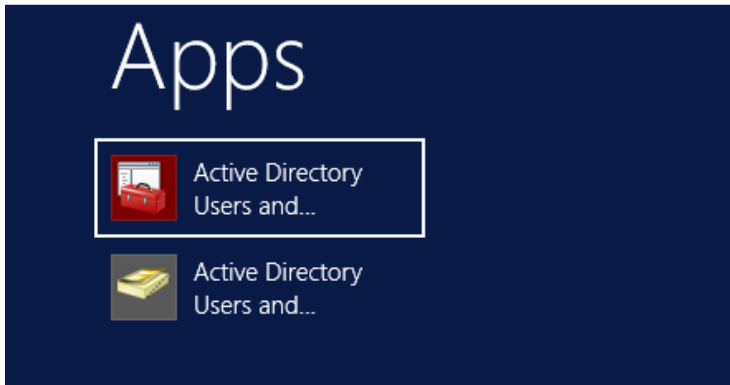

2. Right click on the User account and select Properties
3. Select the DIGIPASS Assignment tab
4. Highlight the DIGIPASS and click the Manage button.

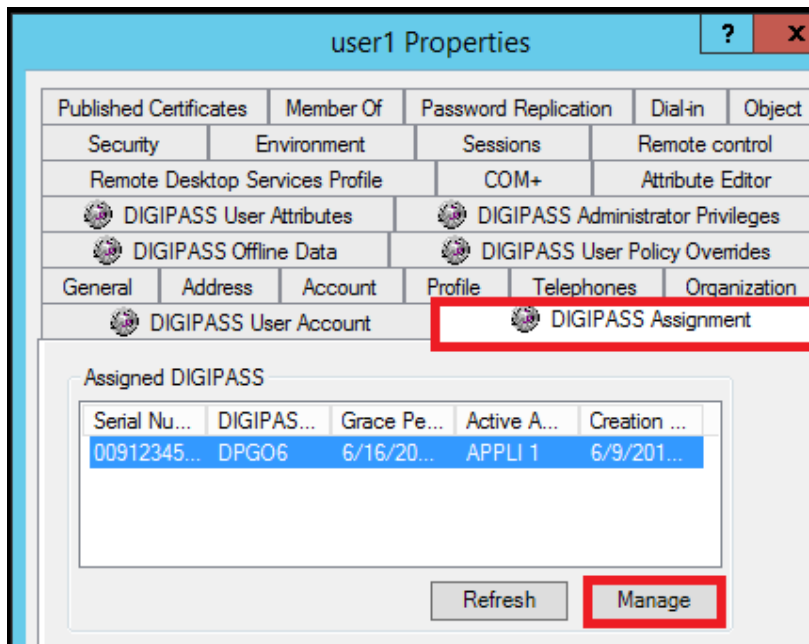

5. Select the application tab. In this example we will choose APPLI 1

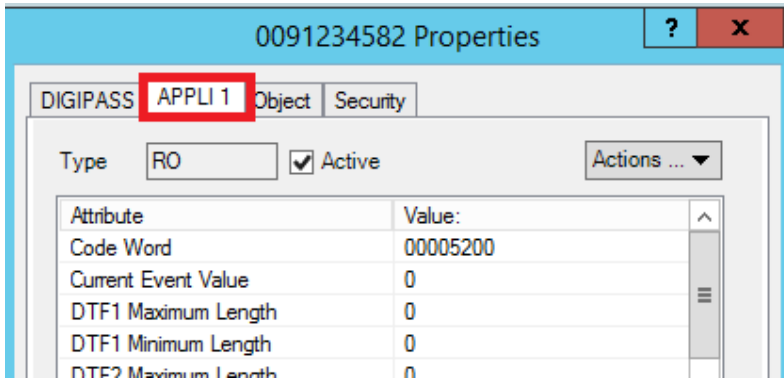

6. Select Disable PIN Support from the Actions drop down list.

